





Standard efficiency wall-hung boilers

Start

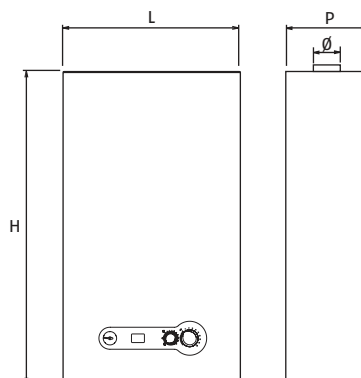

M - FLOW
 U - DHW OUTLET
 G - GAS
 R - RETURN
 E - DHW INLET



- Conventional flue and room-sealed models
- Models: heating-only and combi
- Digital display

Description	H	L	P	Ø	Net weight
	mm	mm	mm	mm	kg
START 24 KIS	715	405	248		31
START 28 KIS	740	400	328		33
START 35 KIS	780	505	328		42
START 28 KI	740	450	328	140	30

The Start range features a modern and functional design completed by a digital screen including essential information. The stylish casing, the compact size and special finishing details allows its installation into any setting.

The new Start is available both conventional flue and room sealed with 24, 28 and 35 kW output with heating only or heating and DHW production models.

- Double-heat exchanger (CH and DHW stainless steel plate heat-exchangers)
- CTR system to achieve faster desired comfort and reduce fuel consumption
- Frost protection function which protects the heating and DHW circuits down to -3°C, with the possibility of extending protection down to -10°C (as optional)
- Thermoregulation control supplied as standard fitted with the external probe (as optional).

TECHNICAL DATA

Output kW 80°/60° min - max	Efficiency Pn (80°/60°) %	Efficiency P30% (*) %	DHW production l/min (Δt 25°)	Gas	Code	Description
ROOM-SEALED - HEATING AND DHW PRODUCTION						
7,5÷24,0	92,8	91,8	13,7	NG	20122798	START 24 KIS
11,0÷27,9	93,0	91,9	16,0	NG	20122801	START 28 KIS
10,8÷34,9	92,9	92,5	20,0	NG	20122802	START 35 KIS
CONVENTIONAL FLUE - HEATING AND DHW PRODUCTION						
8,7÷28,6	92,4	89,4	16,4	NG	20122800	START 28 KI

ACCESSORIES

Description	Code
External probe	4047726
Central heating taps with filter	4047475
Central heating taps	4047476
Solar diverter valve kit for instantaneous wall-hung combi boilers	20025113
Remote control panel (REC08)	20001248
Electrical connection kit: probe – remote control	20012608
TERMORIELLO DGT (Digital room thermostat)	20059640
CHRONORIELLO 7D WIRELESS (7-day digital room thermostat wireless)	20101747
CHRONORIELLO 7D (7-day digital room thermostat)	20063873

RiCLOUD smart remote control

Description	Code	Notes
RiCLOUD with Wi-Fi box	20117394	(1)
RiCLOUD	20117399	(2)
Wi-Fi box	20117402	
RF-wireless boiler receiver	20117359	

(1) Wi-Fi box included to connect to the home Wi-Fi.

(2) Compatible with RF connection to the Wi-Fi box, cod. 20117402 (accessory not included, necessary to connect to the home Wi-Fi).