


# EKJ-SA/SA5

## PRESSURE BOOSTER



602SA/SA5 / 802SA/SA5

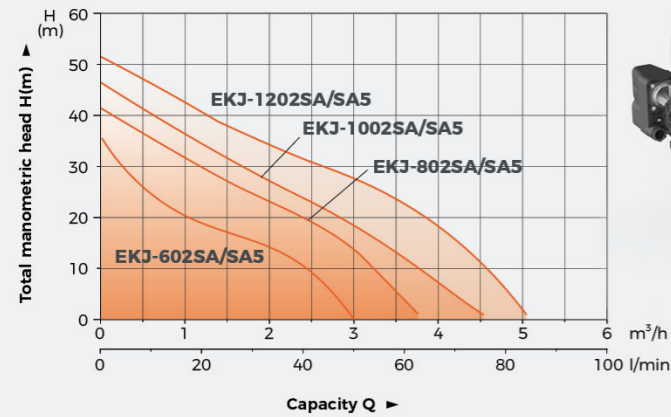

1002SA/SA5 / 1202SA/SA5



Optional five-way valve


### Features

- Self-priming garden pump, also suitable for the pressurisation of water in domestic applications
- Compact, light, robust and easy to use
- Motor with thermal protector
- The pressure tank configuration will bring a better user experience
- Equipped with stainless steel pump body

Model	EKJ-602SA/SA5	EKJ-802SA/SA5	EKJ-1002SA/SA5	EKJ-1202SA/SA5
Rated Power	600 W	800 W	1000 W	1200 W
Max. Head	35 m	40 m	45 m	50 m
Max. Flow	3.0 m³/h	3.7 m³/h	4.5 m³/h	5.0 m³/h
Max. Suction Depth	7 m	7 m	8 m	8 m
Start Pressure	1.4 bar	1.4 bar	1.4 bar	1.4 bar
Stop Pressure	2.4 bar	2.8 bar	2.8 bar	2.8 bar
Tank	19 L	19 L	19 L	19 L
Outlet/Inlet	1"x1"	1"x1"	1"x1"	1"x1"
Power Cable Type	H07RN-F 1.5m	H07RN-F 1.5m	H07RN-F 1.5m	H07RN-F 1.5m
Protection Class	IPX4	IPX4	IPX4	IPX4
Max. Delivery Temperature	35 °C	35 °C	35 °C	35 °C
Package Dimension	470x300x510 mm	470x300x510 mm	470x300x530 mm	470x300x530 mm
Package Gross Weight	12.4 kg	13.3 kg	15 kg	15.9 kg
Qty/20'GP	340	340	364	364

# EKJ-PA/PA5

## PRESSURE BOOSTER

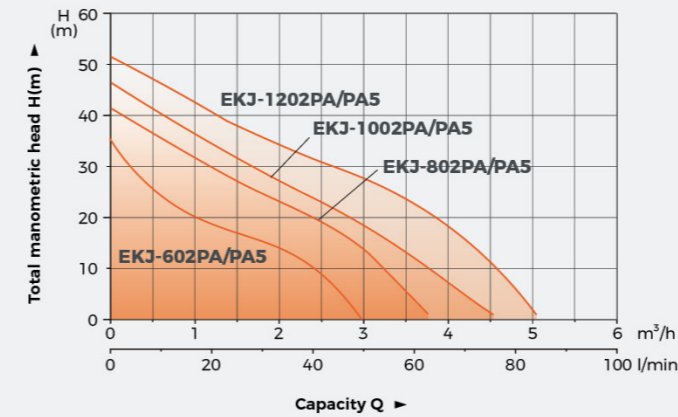

602PA/PA5 / 802PA/PA5



1002PA/PA5 / 1202PA/PA5



Optional five-way valve

### Features

- Self-priming garden pump, also suitable for the pressurisation of water in domestic applications
- Compact, light, robust and easy to use
- Motor with thermal protector
- The pressure tank configuration will bring a better user experience
- Equipped with engineering plastic pump body

Model	EKJ-602PA/PA5	EKJ-802PA/PA5	EKJ-1002PA/PA5	EKJ-1202PA/PA5
Rated Power	600 W	800 W	1000 W	1200 W
Max. Head	35 m	40 m	45 m	50 m
Max. Flow	3.0 m³/h	3.7 m³/h	4.5 m³/h	5.0 m³/h
Max. Suction Depth	7 m	7 m	8 m	8 m
Start Pressure	1.4 bar	1.4 bar	1.4 bar	1.4 bar
Stop Pressure	2.4 bar	2.8 bar	2.8 bar	2.8 bar
Tank	19 L	19 L	19 L	19 L
Outlet/Inlet	1"x1"	1"x1"	1"x1"	1"x1"
Power Cable Type	H07RN-F 1.5m	H07RN-F 1.5m	H07RN-F 1.5m	H07RN-F 1.5m
Protection Class	IPX4	IPX4	IPX4	IPX4
Max. Delivery Temperature	35 °C	35 °C	35 °C	35 °C
Package Dimension	470x300x520 mm	470x300x520 mm	470x300x540 mm	470x300x540 mm
Package Gross Weight	12.2 kg	13.1 kg	14.9 kg	15.8 kg
Qty/20'GP	324	324	364	364