


# APZ19-750 Simple

## Shower drain with an edge for two-sided grid

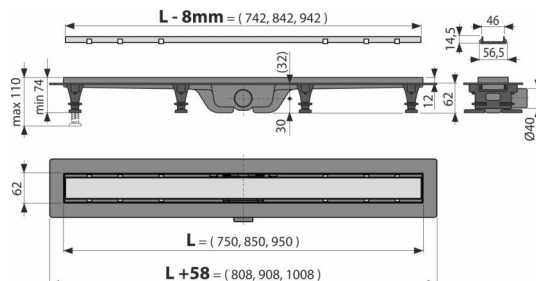

### Application

- For wheelchair access
- For drainage of floor-level showers
- For installation into open spaces or near the wall of the shower area
- For indoor use

### Features

- Secure connection to the construction waterproofing system
- Combined odour trap provides protection against odour from the sewage even after the water dries out from the waste
- Material: polypropylene filled with talc resistant to mechanical, chemical and thermal damage
- Mechanically cleanable trap up to the waste pipe
- They are made of highly durable plastic that resists frost and chemistry
- Grid is included in packaging
- Adjustable plastic anchoring legs 0–35 mm allowing fast and convenient installation, including the precise setting of the required level

### Scope of supply

- Fixation set: screw  $\text{\O}4.2 \times 38$  – 8 pcs, dowel  $\text{\O}8$  – 8 pcs 0-0 0
- Combined odour trap SMART
- Two-sided grid DOUBLE (full grid or grid for embedding tiles) 0-0 0
- Self-adhesive waterproofing tape 0-0 0
- Height adjustable feet 4 pcs
- Linear shower drain

### Order number, Logistic information

Code	EAN	Weight (piece   packing   palett)	Dimensions (piece   packing)	Quantity (packing   palett)
APZ19-750	8595580583163	750 mm 1,96   58,82   196,4 kg	865x80x145   885x785x415 mm	30   90 pcs

**Warranty** 2/6 years \*     
 **Customs code** 39229000

### Technical specifications

- Total installation height 75-110 mm
- Minimum thickness of concrete 62 mm
- Waste outlet diameter 40 mm
- Flow of the inlet grid 24 l/min
- Load class H15 150
- Odor trap combined with a water seal 25 mm