


ECO SMART SURFACE MOUNTED

AQUATIV



- 90 Pcs highly efficient **SAMSUNG** brand SMD LED (Cool White - Warm White)
- 90 Pcs highly efficient **EDISON** brand LED (Blue-RGB-Amber)
- IP68 Protection Class with powerful and reliable 3 level insulation design
- 3 different frame option (White -Anthracite Grey-Chrome Coated)
- Brand "**AQUATIV Cable**"

Surface Mounted

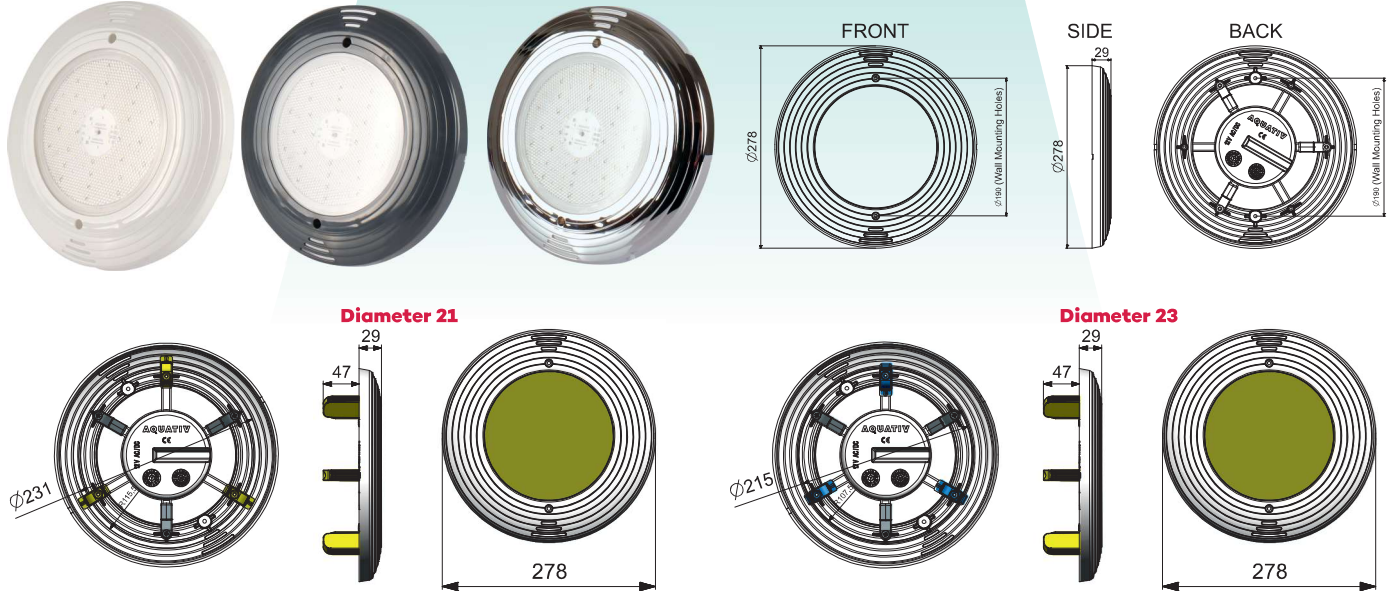

MUST ALWAYS BE INSTALLED SUBMERGED IN WATER

Code	Color	Led Brand	Box	Box Weight	Box Dimensions
AES01	White	Samsung	20 pcs	14,5 kg	60x90x60
AES02	Warm White	Samsung	20 pcs	14,5 kg	60x90x60
AES03	Blue - White	Edison / Samsung	20 pcs	14,5 kg	60x90x60
AES04	Blue	Edison	20 pcs	14,5 kg	60x90x60
AES05	RGB 4 Cables	Edison	20 pcs	14,5 kg	60x90x60
AES07	Amber	Edison	20 pcs	14,5 kg	60x90x60

Product Code	AES01	AES02	AES03	AES04	AES05	AES07
Color	White	Warm White	Blue - White	Blue	Rgb 4 Cables	Amber
Led Type	Mid. Power Led	Mid. Power Led	Mid. Power Led	Mid. Power Led	Mid. Power Led	Mid. Power Led
Qty of Led	90 Adet	90 Adet	90 Adet	90 Adet	30K+30Y+30M	90 Adet
Power	23W(±10%W)	23W(±10%W)	23W(±10%W)	23W(±10%W)	23W(±10%W)	23W(±10%W)
Input Voltage	12±1VAC	12±1VAC	12±1VAC	12±1VAC	12±1VAC	12±1VAC
Frequency	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	-	50/60 Hz
Lumen	<=2700 lm	<=2610 lm	<=1380 lm	<=720 lm	<=1500 lm	<=650 lm
Operating Temperature	-30~+80°C	-30~+80°C	-30~+80°C	-30~+80°C	-30~+80°C	-30~+80°C
Standart Cable Lenght	100 cm	100 cm	100 cm	100 cm	100 cm	100 cm
Specs. Of Cable	2x0,75 mm ²	2x0,75 mm ²	2x0,75 mm ²	2x0,75 mm ²	2x0,75 mm ²	2x0,75 mm ²
Protection Class	IP68	IP68	IP68	IP68	IP68	IP68
Life Time	50000 Hours	50000 Hours	50000 Hours	50000 Hours	50000 Hours	50000 Hours