



Application

- Hot water circulation and heating system
- Air-conditioning system
- Industrial circulation system
- General pressure boosting in household

Pump


- Cast iron pump body and support under special anti-rust treatment
- AISI 304 shaft
- Liquid temperature: 2°C ~ 100°C

Motor

- Insulation class: B
- Enclosures class: IP44

Identification Codes


LP (m) 1500

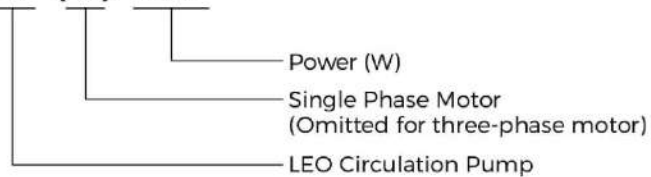


Technical Data

Model	Power		Q(m³/h)	0	6	9	12	15	18	21	24	30	32
	kW	HP	Q(l/min)	0	100	150	200	250	300	350	400	500	533
LP(m)1500	1.5	2	H (m)	36	25	24	23	21	19	17	13	5	0
LP(m)2200	2.2	3		34	33	32	30	28	26	23	20	12	8

Dimension

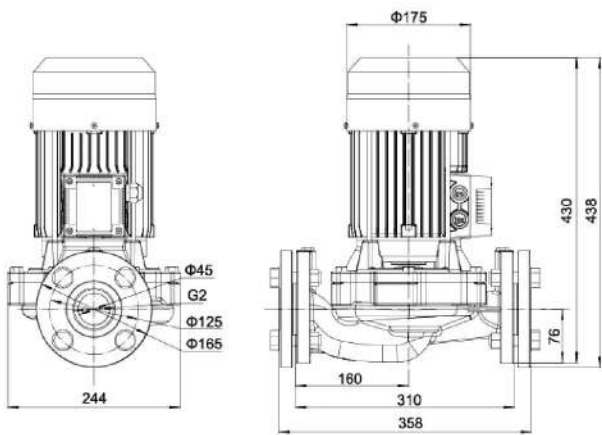

Three-phase

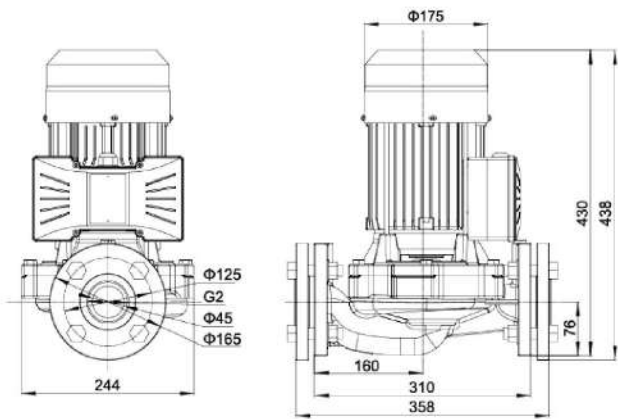

Single-phase

Hydraulic Performance Curves

