




Silk Pattern Black  
RAL 9005 - Textured Matt




Snow White  
RAL 9016 - 10 Gloss  
Textured Matt



Max. Working Pressure  
10 Bar



5 Years Warranty

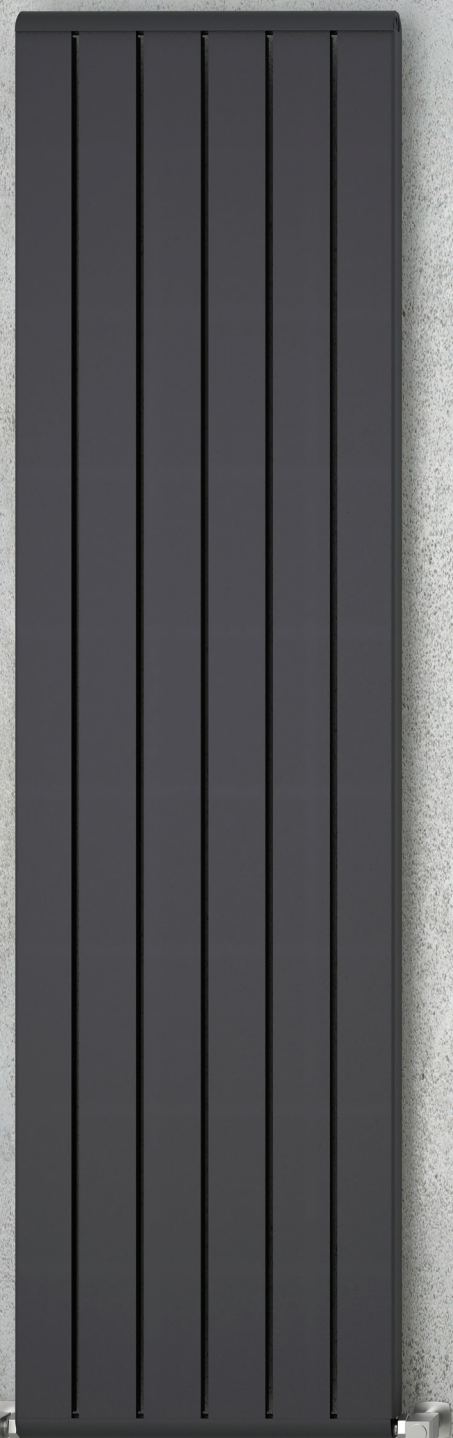


1800 x472 mm in silk pattern black colour




# ARMONI

## ALUMINIUM



Compact Ventil

Connection Diameter  
1/2"

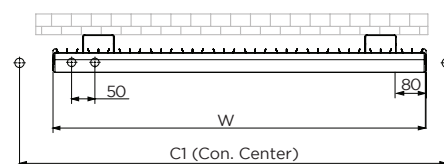

Horizontal Connection Centers (C1)

C1= Radiator Width (W) + 80 mm (Valid for Tempo valves.)  
C1= Radiator Width (W) + 70 mm (Valid for Azur, Onix valves.)



Vertical Connection Centers (C2)  
C2= Radiator Height - 28 mm

Height (H) mm	Vertical Connection Centers (C2) mm	Heated Surface Per Section m <sup>2</sup>	Water Volume Per Section lt	Weight Per Section kg	Heat Output Per Section					
					Δt = 60 (20° C)			Δt = 50 (20° C)		
					kcal/h	watt	btu/h	kcal/h	watt	btu/h
300	272	0.16	0.09	0.45	50	58	198	39	46	156
400	372	0.22	0.11	0.55	65	75	257	51	59	201
500	472	0.27	0.13	0.65	79	92	313	62	72	245
600	572	0.33	0.15	0.76	93	108	368	73	85	288
900	872	0.49	0.21	1.06	132	154	526	104	121	411
1000	972	0.55	0.23	1.16	145	169	576	114	132	451
1200	1172	0.66	0.27	1.37	170	198	675	133	154	527
1500	1472	0.82	0.32	1.67	206	239	816	160	187	636
1800	1772	0.99	0.38	1.98	240	279	951	187	217	741

Width Per Section

Number of Sections pcs	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
Width (W) mm	312	392	472	552	632	712	792	872	952	1032	1112	1192	1272	1352	1432	1512	1592	1672	1752	1832	1912
Horizontal Connection Centers (C1) mm	392	472	552	632	712	792	872	952	1032	1112	1192	1272	1352	1432	1512	1592	1672	1752	1832	1912	1992